

Increase your  
productivity  
and production  
quality with the  
**SX Elite range**

**Industry experience includes:**  
Medical, Electronics & Precision engineering






Whether looking for moulding defects, surface finish, machining residue, correct assembly or much more, quality assurance is enhanced. **Reducing cost and increasing quality.**

## REDUCED COSTS + INCREASED QUALITY

Nature has designed our visual system to be so dominant that our bodies adapt to accommodate any deficiency in the way we see. By **enhancing the visual sense** we extend the body's capability.

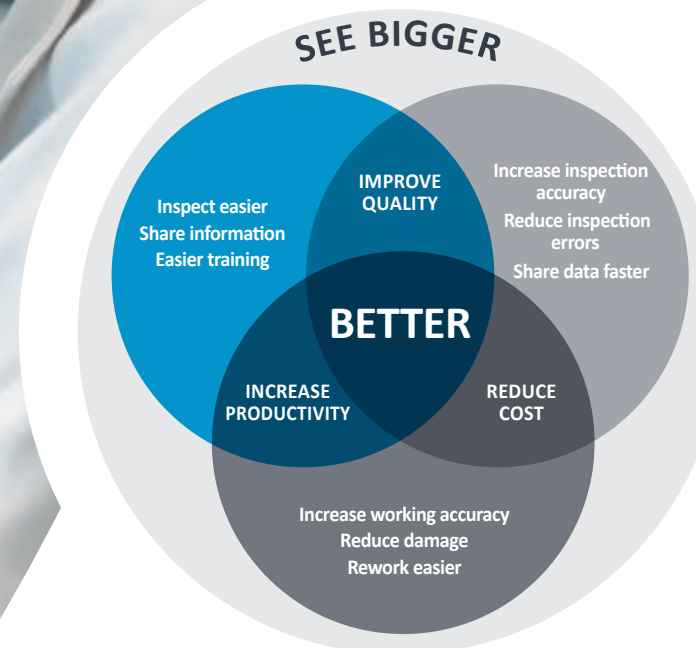

### Looking at details

Inspection of small details in finished items or supplied components is made easier and more efficient at the right magnification. Whether looking for moulding defects, surface finish, machining residue, correct assembly or much more, quality assurance is enhanced, reducing cost and increasing quality.

### Working with tools

Depth perception is often required when working with tools. This is especially important when working with sensitive or delicate subjects or when working with small components. SX Elite provides the necessary depth perception allowing easier working, increasing efficiency and reducing errors.

### Reporting results

Swift and accurate communication is vital in the modern working environment. SX Elite's camera system gives you the ability to quickly and efficiently capture and share images with suppliers, customers and team members, saving money and reducing waste.



**Work quicker and easier**

Enables easy access for reworking and sample manipulation. View more of the subject with easier location of points of interest, efficient inspecting and working with tools.

**See more detail**

Different subjects require different illumination. SX Elite offers direct, oblique, quadrant, ultra violet and sub-stage illumination for optimal lighting for each subject type. By lighting subjects correctly more details can be seen clearly, increasing speed and confidence of inspections and rework.

**Share information, communicate efficiently and extend ability**

Pictures aid accurate and efficient communication. View, capture and annotate images easily and quickly for training, archiving, communicating with colleagues, suppliers and customers.

Communicate effectively with suppliers increasing speed of issue resolution, increasing product quality and reducing down time. The easy-to-use software supports custom overlays and image enhancements, extending inspection capability.

SX Elite's camera option comes complete with ViCapture, Vision Engineering's intuitive imaging software. SX Elite's camera is also compatible with Vision Engineering's entire suite of inspection software.



**Key features**

- Stereo zoom microscope
- Available magnification range: x4 - x200
- Maximum working distance: 220mm
- Digital imaging option
- Customisable illumination
- Range of stands

SX45 Elite with bench stand

# MAGNIFICATION + FLEXIBILITY

SX Elite's **easy-to-use zoom control** combines speedy access to greater visual data with flexibility of operation. Click stop magnification points allow users to recall magnifications quickly, easily and repeatably. The addition of magnifying eyepieces and external objectives enable precise magnification adjustment to meet user's needs.





# STAND OPTIONS


## + TECHNICAL INFORMATION

There are several factors that are inseparable when selecting **working magnification**. As magnification increases, **field of view** and **working distance** decrease.

### Stand selection

Select the stand that best meets the needs of the task. Require space for large samples, special equipment or clean/clear work area?

Then select a boom stand or articulated arm. If light from below is required, choose a bench stand.

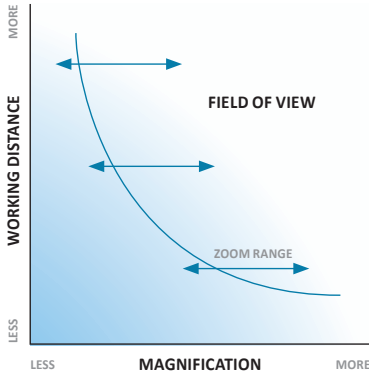

## TECHNICAL INFORMATION



SX25 Elite

SX45 Elite

SX45-TR Elite

### OPTICAL DATA

Standard magnification range	x10 - x45	x8 - x50	x8 - x50
Minimum / Maximum capable magnification	x5 - x180	x4 - x200	x4 - x200
Zoom ratio	4.5:1	6.3:1	6.3:1
Working distance (standard)	97mm	115mm	115mm
Working distance (maximum)	180mm	220mm	220mm
Optical principle	Greenough	Greenough	Greenough

### FEATURE DATA

Binocular eyepieces	✓	✓	✓
Trinocular camera port	-	-	✓
Eyepiece options	10x, 15x, 20x	10x, 15x, 20x	10x, 15x, 20x
Additional objective	0.5x, 0.75x, 2.0x	0.5x, 0.7x, 2.0x	0.5x, 0.7x, 2.0x

### ACCESSORY OPTIONS

Image capture	-	-	✓
Imaging software	-	-	✓
Floating stage	-	✓	✓
Measurement comparison graticule	✓	✓	✓
Standard ring-light	✓	✓	✓
Quadrant ring-light	✓	✓	✓

### SX25 Elite optical configurations

Eyepieces	Objective Lens	Zoom Range	Working Distance
x10/20 E.W.	x0.5	x5 - x22.5	180mm
x10/20 E.W.	x0.75	x7.5 - x33.8	120mm
x10/20 E.W.	x1.0*	x10 - x45	97mm
x10/20 E.W.	x2.0	x20 - x90	30mm
x15/16 W.F.	x0.5	x7.5 - x33.6	180mm
x15/16 W.F.	x0.75	x11.3 - x50.6	120mm
x15/16 W.F.	x1.0*	x15 - x67.5	97mm
x15/16 W.F.	x2.0	x30 - x135	30mm
x20/11 W.F.	x0.5	x10 - x45	180mm
x20/11 W.F.	x0.75	x15 - x67.5	120mm
x20/11 W.F.	x1.0*	x20 - x90	97mm
x20/11 W.F.	x2.0	x40 - x180	30mm


\*Standard objective

### SX45 Elite optical configurations


Eyepieces	Objective Lens	Zoom Range	Working Distance
x10/22 F.N.	x0.5*	x4 - x25	220.6mm
x10/22 F.N.	x1.0	x8 - x50	115.0mm
x10/22 F.N.	x2.0	x16 - x100	57.5mm
x15/16 F.N.	x0.5*	x6 - x37.5	220.6mm
x15/16 F.N.	x1.0	x12 - x75	115.0mm
x15/16 F.N.	x2.0	x24 - x150	57.5mm
x20/13 F.N.	x0.5*	x8 - x50	220.6mm
x20/13 F.N.	x1.0	x16 - x100	115.0mm
x20/13 F.N.	x2.0	x32 - x200	57.5mm

\*Stand extension required when using x0.5 objective lens with bench stand model to accommodate increased working distance


### SX25 Elite bench stand




### SX45 Elite bench stand




### Single arm boom with base

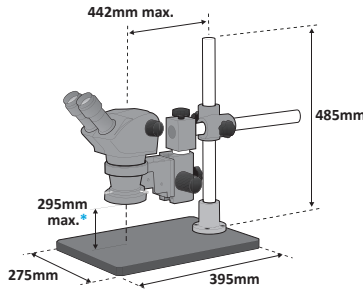


### Double arm boom with base

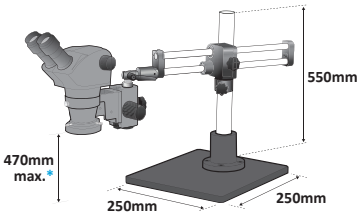

### Articulated arm boom with clamp



### Double arm boom with clamp

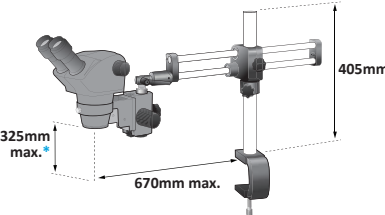

\*less working distance, with x1.0 objective

Stand options	SX25 Elite bench stand	SX45 Elite bench stand	Single arm boom with base	Double arm boom with base	Articulated arm boom with clamp	Double arm boom with clamp
SX25 Elite	✓	✓	✓	✓	✓	✓
SX45 Elite	-	✓	✓	✓	✓	✓
Sub stage illuminator	✓	✓	-	-	-	-
Incident illuminator	✓	✓	-	-	-	-
Height adjust	✓	✓	✓	✓	✓	✓
X/Y adjust	-	-	✓	✓	✓	✓
Floating stage compatible	-	✓	-	-	-	-
Ring light compatible	✓	✓	✓	✓	✓	✓

For Sales, Service & Spares contact:

# Optimax

Imaging Inspection Measurement

Michael Francis House • 3 Trimbush Way  
Market Harborough • Leicestershire • LE16 7XY  
Registered in England No. 5562754  
VAT No. 780 4974 94

T +44 [0]1858 436940  
E [info@optimaxonline.com](mailto:info@optimaxonline.com)

F +44 [0]1858 436941  
[www.optimaxonline.com](http://www.optimaxonline.com)

